

YY

Ties with A World of Difference

CABLE ACCESSORIES



SINCE 1964
YONYU GROUP

Y.Y. CABLE ACCESSORIES CO., LTD

CABLE TIES

尼龍束帶





A. Our ties meet most basic cable tie needs, with choices covering a wide range of requirements for size and strength. One-piece, injection-moulded construction provides maximum strength and adjustability for securing all sizes of bundles. Extra features such as rounded edges and bent-tip design make installation easy, fast, accurate and secure.

B. Split mandrel, loop tensile strength tests show that the most vulnerable stress point for a nylon cable tie is its pawl. There is a trade-off between insertion / pull-up ease and strength of a cable tie. The stronger the pawl, the more force is required to insert and pull up the strap as it engages the pawl teeth. Cable ties are designed to optimize insertion ease and still meet or exceed all applicable strength requirements.

C. Refer to left SKETCH, the magnified cross-section illustrates our full four-tooth locking engagement between strap and pawl under load. We use CAD / CAE & CAM process to design four tooth locking. This intimate contact between pawl and strap teeth ensures that the strength of the pawl is fully utilized.

1. 本公司生產的束帶尺寸齊全，符合使用需求，一體射出成形的構造於使用上提供最佳拉力，及適用不同束徑尺寸的捆綁。束帶圓弧邊緣與尾部易穿易拉的設計更讓安裝簡單、快速、精準、安全。
2. 從拉力機測試證明，尼龍束帶最易斷裂的就在齒部。而束帶設計的好壞也在於其使用上是否易穿易拉，符合所需的機能及拉力標準。
3. 從左邊圖示得知，永裕所採用之完整CAD / CAE及CAM等電腦輔助工程所設計之四齒束帶，在穿拉動作時，齒部帶身之精密配合，使齒部堅韌的抗拉動作得以發揮比UL所規定更佳之拉力及機能。

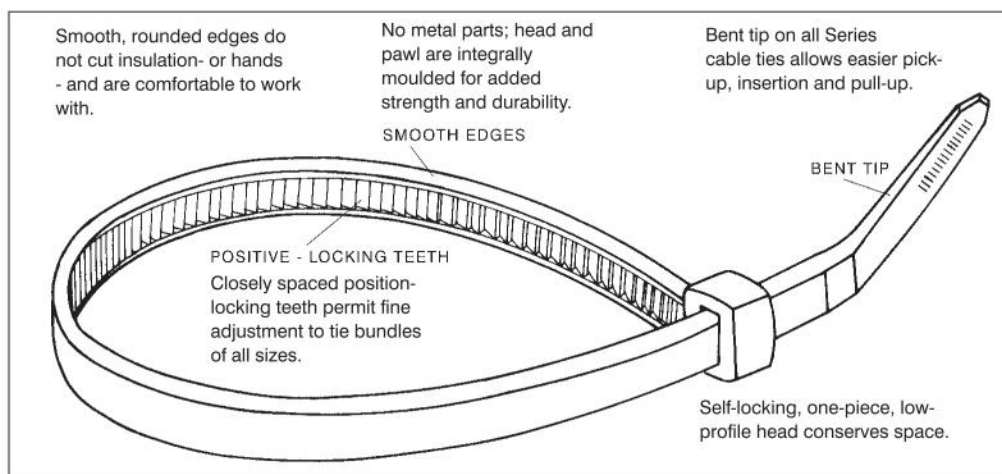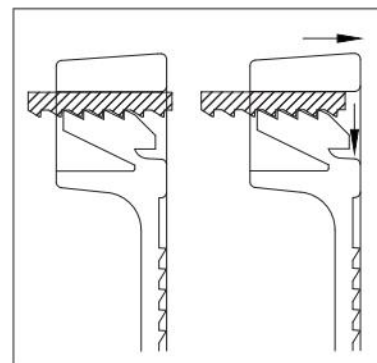

Certificate of Compliance

E118226 (R)

YY Cable Ties were tested according to the current UL requirement:

UL 62275 – Cable Management Systems – Cable Ties for Electrical Installations

CSA C22.2 No. 62275-10 – Standard for Cable Management Systems – Cable Ties for Electrical Installations

USL, CNL: Non Metallic Cable Ties

Cat Nos.: TSL-80-M, TSL-100-M, TSL-120-M, TSL-140-M, TSL-160-M, TSL-200-M, TSL-140-I, TSL-150-I, TSL-180-I, TSL-200-I, TSL-250-I, TSL-300-I, TSL-370-I, TSL-120-S, TSL-160-S, TSL-190-S, TSL-200-S, TSL-250-S, TSL-290-S, TSL-300-S, TSL-370-S, TSL-385-S, TSL-430-S, TSL-500-S, TSL-530-S, TSL-150-LHD, TSL-200-LHD, TSL-290-LHD, TSL-370-LHD, TSL-450-LHD, TSL-540-LHD, TSL-430-HD, TSL-530-HD, TSL-610-HD, TSL-710-HD, TSL-770-HD, TSL-800-HD, TSL-910-HD, TSL-950-HD, TSL-1020-HD, TSL-1200-HD, TSL-1530-HD, TSL-240-EHD, TSL-300-EHD, TSL-400-EHD, TSL-500-EHD, TSL-600-EHD, TSL-700-EHD, TSL-800-EHD, TSL-1030-EHD, RT-150-S, RT-200-S, RT-300-S, RT-385-S

USL, CNL: Non Metallic Cable Ties with Integral Fixing Device

Cat Nos.: MHT-150-I, MHT-200-S, MHT-300-S, MHT-370-LHD

CABLE TIES

尼龍束帶



Y.Y. CABLE TIES

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-80-M	78 (3.0")	2.5±0.15 (0.10"±0.006")	15	8 (18)	100pcs /1000pcs
TSL-100-M	100 (4.0")		21		
TSL-120-M	116 (4.6")		28		
TSL-140-M	140 (5.5")		34		
TSL-160-M	161 (6.3")		40		
TSL-200-M	203 (8.0")		55		
TSL-140-I	142 (5.5")	3.5±0.3 (0.14"±0.012")	34	18 (40)	
TSL-150-I	150 (6.0")		37		
TSL-180-I	180 (7.1")		47		
TSL-200-I	201 (8.0")		54		
TSL-250-I	250 (9.8")		70		
TSL-300-I	290 (11.4")		82		
TSL-370-I	372 (14.6")	106	22 (50)		
TSL-120-S	121 (4.8")	4.6±0.3 (0.18"±0.012")		25	
TSL-160-S	157 (6.2")			40	
TSL-190-S	188 (7.4")			54	
TSL-200-S	199 (8.0")			54	
TSL-250-S	250 (9.8")			68	
TSL-290-S	288 (11.0")			81	
TSL-300-S	302 (11.9")			84	
TSL-370-S	371 (14.6")			106	
TSL-385-S	387 (15.2")			114	
TSL-430-S	430 (16.9")			125	
TSL-500-S	507 (20.0")			151	
TSL-530-S	533 (21.0")		160		
TSL-150-LHD	149 (5.9")	7.5±0.3 (0.30"±0.012")	35	54 (120)	
TSL-200-LHD	200 (8.0")		54		
TSL-290-LHD	290 (11.4")		82		
TSL-370-LHD	370 (14.5")		106		
TSL-450-LHD	450 (17.7")		130		
TSL-540-LHD	541 (21.3")		160		
TSL-430-HD	430 (16.9")	8.7±0.4 (0.34"±0.015")	120	79 (175)	
TSL-530-HD	530 (20.9")		150		
TSL-610-HD	613 (24.0")		175		
TSL-710-HD	709 (27.9")		185		
TSL-770-HD	774 (30.5")		220		
TSL-800-HD	800 (31.5")		235		
TSL-910-HD	920 (36.0")		278		
TSL-950-HD	940 (37.0")		284		
TSL-1020-HD	1160 (45.7")		355		
TSL-1200-HD	1220 (48.0")		374		
TSL-1530-HD	1530 (60.2")		460		
TSL-240-EHD	246 (9.7")	12.4±0.45 (0.49"±0.018")	64	114 (250)	
TSL-300-EHD	293 (11.5")		81		
TSL-400-EHD	404 (15.9")		114		
TSL-500-EHD	510 (20.1")		150		
TSL-600-EHD	618 (24.3")		181		
TSL-700-EHD	724 (28.5")		216		
TSL-800-EHD	830 (32.7")		248		
TSL-1030-EHD	1020 (40.2")		300		

CABLE TIES

尼龍束帶




- Material: Nylon 6/6
- Flammability: UL 94V-2
- Working Temp.: -40°C to 85°C
- Color: stock in natural & black (other colors are also available)
- Made to comply with MIL-SPEC M20693B, tensile strength meet or exceed MIL-S 23190E Standard
- Remark: complete range, stable quality and low insertion

Y.Y. CABLE TIES

(01) 尼龍束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色、黑色
- ◎特點：規格齊全、品質穩固



MINIATURE CROSS SECTION

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-80-M	78 (3.0")	2.5±0.15 (0.10"±0.006")	15	8 (18)	100pcs /1000pcs
TSL-100-M	100 (4.0")		21		
TSL-120-M	116 (4.6")		28		
TSL-140-M	140 (5.5")		34		
TSL-160-M	161 (6.3")		40		
TSL-200-M	203 (8.0")		55		

INTERMEDIATE CROSS SECTION

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-140-I	142 (5.5")	3.5±0.3 (0.14"±0.012")	34	18 (40)	100pcs /1000pcs
TSL-150-I	150 (6.0")		37		
TSL-180-I	180 (7.1")		47		
TSL-200-I	201 (8.0")		54		
TSL-250-I	250 (9.8")		70		
TSL-300-I	290 (11.4")		82		
TSL-370-I	372 (14.6")		106		

STANDARD CROSS SECTION

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. TRENGTH kg (lbs)	包裝 PACKING
TSL-120-S	121 (4.8")	4.6±0.3 (0.18"±0.012")	25	22 (50)	100pcs /1000pcs
TSL-160-S	157 (6.2")		40		
TSL-190-S	188 (7.4")		54		
TSL-200-S	199 (8.0")		54		
TSL-250-S	250 (9.8")		68		
TSL-290-S	288 (11.0")		81		100pcs
TSL-300-S	302 (11.9")		84		
TSL-370-S	371 (14.6")		106		
TSL-385-S	387 (15.2")		114		
TSL-430-S	430 (16.9")		125		
TSL-500-S	507 (20.0")		151		
TSL-530-S	533 (21.0")		160		

CABLE TIES

尼龍束帶



LIGHT HEAVY DUTY CROSS SECTION

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-150-LHD	149 (5.9")	7.5±0.3 (0.30"±0.012")	35	54 (120)	100pcs
TSL-200-LHD	200 (8.0")		54		
TSL-290-LHD	290 (11.4")		82		
TSL-370-LHD	370 (14.5")		106		
TSL-450-LHD	450 (17.7")		130		
TSL-540-LHD	541 (21.3")		160		

HEAVY DUTY CROSS SECTION

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-430-HD	430 (16.9")	8.7±0.4 (0.34"±0.015")	120	79 (175)	100pcs
TSL-530-HD	530 (20.9")		150		
TSL-610-HD	613 (24.0")		175		
TSL-710-HD	709 (27.9")		185		
TSL-770-HD	774 (30.5")		220		
TSL-800-HD	800 (31.5")		235		
TSL-910-HD	920 (36.0")		278		
TSL-950-HD	940 (37.0")		284		
TSL-1020-HD	1160 (45.7")		355		
TSL-1200-HD	1220 (48.0")		374		
TSL-1530-HD	1530 (60.2")		460		

EXTRA HEAVY DUTY CROSS SECTION

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-240-EHD	246 (9.7")	12.4±0.45 (0.49"±0.018")	64	114 (250)	100pcs
TSL-300-EHD	293 (11.5")		81		
TSL-400-EHD	404 (15.9")		114		
TSL-500-EHD	510 (20.1")		150		
TSL-600-EHD	618 (24.3")		181		
TSL-700-EHD	724 (28.5")		216		
TSL-800-EHD	830 (32.7")		248		
TSL-1030-EHD	1020 (40.2")		300		

CABLE TIES

尼龍束帶




UPGRADE UV CABLE TIES

(02) 耐候束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：黑色
- ◎抗紫外線，戶外環境使用



- Material: UL approved Nylon 6/6
- Flammability: UL94V-2
- Operation Temp.: -40°C to 85°C
- UL certified, resist to ultraviolet light, 7-9 years guarantee outdoor use
- Applied to Automotive, Oil & Gas, Petroleum, Marine, Solar power energy, Farm, Garden



品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN.STRENGTH kg (lbs)	包裝 PACKING
UVT-100-M	100 (4.0")	2.5±0.15 (0.10"±0.006")	21	8 (18)	100pcs /1000pcs
UVT-200-M	203 (8.0")		55		
UVT-150-I	150 (6.0")	3.5±0.3 (0.14"±0.012")	37	18 (40)	
UVT-200-I	201 (8.0")		54		
UVT-300-I	290 (11.4")		82		
UVT-370-I	372 (14.6")		106		
UVT-200-S	199 (8.0")	4.6±0.3 (0.18"±0.012")	54	22 (50)	100pcs
UVT-250-S	250 (9.8")		68		
UVT-290-S	288 (11.0")		81		
UVT-300-S	302 (11.9")		84		
UVT-370-S	371 (14.6")		106		
UVT-290-LHD	290 (11.4")	7.5±0.3 (0.30"±0.012")	82	54 (120)	
UVT-370-LHD	370 (14.5")		106		
UVT-450-LHD	450 (17.7")		130		
UVT-540-LHD	541 (21.3")		160		
UVT-530-HD	530 (20.9")	8.7±0.4 (0.34"±0.015")	150	79 (175)	
UVT-710-HD	709 (27.9")		185		
UVT-770-HD	774 (30.5")		220		
UVT-910-HD	920 (36.0")		278		
UVT-1200-HD	1220 (48.0")		374		

CABLE TIES

尼龍束帶



HVAC CABLE TIES


(01) 冷氣空調通路專用束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎冷氣空調通路專用



UL 181B-C

- Material: UL approved Nylon 6/6
- Flammability: UL94V-2
- Operation Temp.: -40°C to 85°C
- UL181B-C certified (Mechanical Fasteners for use with Flexible Air Ducts and Air Connectors)
- Designed for use with flexible ducts in HVAC application



品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
TSL-610-HD	613 (24.0")	8.7±0.4 (0.34"±0.015")	175	79 (175)	100pcs
TSL-910-HD	920 (36.0")		278		
TSL-1200-HD	1220 (48.0")		374		



POLYPROPYLENE CABLE TIES

(02) PP 束帶

- ◎材質：Polypropylene
- ◎防火等級：UL 94HB
- ◎顏色：黑色



- Material: Polypropylene
- Flammability: UL 94HB
- For chemical resistance, outstandingly tough in the environment of cydrochloric acid, salts, and bases

品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
PP-100-M	100 (4.0")	2.5±0.15 (0.10"±0.006")	21	8 (18)	1000pcs /100 pcs
PP-150-I	150 (6.0")	3.5±0.3 (0.14"±0.012")	37	18 (40)	
PP-200-S	199 (8.0")	4.6±0.3 (0.18"±0.012")	54	22 (50)	
PP-300-S	302 (11.9")		84		
PP-370-S	371 (14.6")		106		
PP-370-LHD	370 (14.5")	7.5±0.3 (0.30"±0.012")	106	54 (120)	100pcs

CABLE TIES

尼龍束帶




HIGH IMPACT CABLE TIES

(02) 耐衝擊束帶

- ◎材質：Nylon 6/6 high impact
- ◎防火等級：UL 94HB
- ◎顏色：黑色

- Material: Nylon 6/6 high impact
- Flammability: UL 94HB
- Operation Temp.: -40°C to 80°C
- High flexibility in cold environment



品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs)	包裝 PACKING
HIR-200-S	199 (8.0")	4.6±0.3 (0.18"±0.012")	54	22 (50)	1000pcs /100 pcs
HIR-290-S	288 (11.0")		81		100pcs
HIR-300-S	302 (11.9")		84		
HIR-370-S	371 (14.6")		106		
HIR-290-LHD	290 (11.4")	7.5±0.3 (0.30"±0.012")	82	54 (120)	
HIR-370-LHD	370 (14.5")		106		
HIR-770-HD	774 (30.5")	8.7±0.4 (0.34"±0.015")	220	79 (175)	




LOW PROFILE CABLE TIES

(02) 平拉式束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色、黑色
- ◎特點：規格齊全、品質穩固



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Working Temp.: -40°C to 85°C
- Color: stock in natural & black (other colors are also available)
- Remark: complete range, stable quality and low insertion

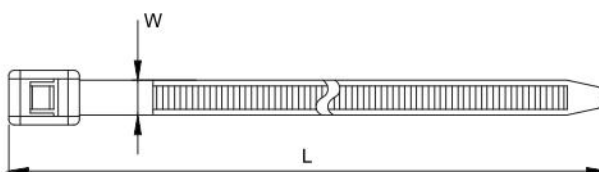


品名 ITEM NO.	長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	最大束徑 MAX. DIA. mm	包裝 PACKING
LPT-250-HD	255 (10.0")	8.7±0.4 (0.34"±0.015")	74	100pcs
LPT-390-HD	391 (15.5")		117	

CABLE TIES

尼龍束帶



AVAILABLE SIZES FOR OTHER MATERIALS (02)

MATERIAL				
長度 LENGTH mm (inch)	寬度 WIDTH mm (inch)	耐溫型束帶 HEAT STABILIZED TIES/ UV STABILIZED	高防火等級束帶 94V-0 FLAME RETARDANT TIES	彩色束帶 COLOR TIES 
100 (4.0")	2.5±0.15 (0.10"±0.006")	◎	◎	◎
116 (4.6")		◎		
161 (6.3")		◎		
150 (6.0")	3.5±0.3 (0.14"±0.012")	◎	◎	◎
199 (8.0")	4.6±0.3 (0.18"±0.012")	◎	◎	◎
288 (11.0")		◎	◎	◎
302 (11.9")		◎	◎	◎
371 (14.6")		◎	◎	◎
370 (14.5")	7.5±0.3 (0.30"±0.012")	◎	◎	◎

● For other materials, colors, or sizes not listed, please feel free to contact us for further service

◎ 若有材質，顏色及尺寸不在本表所列之品項，亦歡迎洽詢。

◎ 本公司專業的研發及模具設計製造，隨時為您提供更完善的服務。

TECHNICAL DATA OF VARIOUS TIE MATERIALS

CRITERIA	NYLON 6/6				NYLON 12
	NATURAL	WEATHER RESISTANT	HEAT STABILIZED/ UV STABILIZED	FLAME RETARDANT	WEATHER RESISTANT
COLOR	NATURAL/BLACK	UV BLACK	LIGHT GREEN/ BLACK	IVORY/BLACK	BLACK
FLAMMABILITY	94V-2	94V-2	94V-2	94V-0	
WATER ABSORPTION (24 HRS)	1.20%	1.20%	1.20%	0.90%	0.30%
UV LIGHT RESISTANCE	FAIR	GOOD	FAIR	POOR	GOOD
WORKING TEMP.	-40℃ ~ 85℃	-40℃ ~ 85℃	-40℃ ~ 105℃ -40℃ ~ 145℃	-40℃ ~ 85℃	-40℃ ~ 80℃

CABLE TIES

尼龍束帶



TSL	100	M	Y	T
PART DESCRIPTION (Item No.)	LENGTH (mm)	WIDTH (mm)	PACKING SIZE (pcs/bag)	COLOR
TSL: TIE SELF LOCK (Y. Y. 一般束帶) UVT: ULTRA VIOLET TIE (耐候型束帶) HST: HEAT STABILIZED TIE (耐溫型束帶) V0: 94V-0 FLAME RETARDANT TIE (高防火等級束帶) 02TSL: COLOR TIES (彩色束帶)		M (Miniature)=2.5mm I (Intermediate)=3.6mm S (Standard)=4.8mm LHD (Light Heavy Duty)=7.6mm HD (Heavy Duty)=8.8mm EHD (Extra Heavy Duty)=12.4mm	M=1000 F=500 Y=100 I=50 D=25	○ T=Natural ● B=Black ● O=Orange ● G=Green ● L=Blue ● R=Red ● S=Grey ● Y=Yellow ● V=Purple ● C=Brown (not all ties available in all colors)

YY provides full range of cable ties sizes that the length is from 80mm up to 1030mm with minimum tensile strength from 18lbs up to 250lbs and different bundle diameters. Cable ties are also available in a variety of materials and colors and in different styles such as Releasable Ties, Mountable Head ties, Marker ties, Push Mount Tie, etc to meet the needs of special applications. YY continually provides quality wiring accessories products for the purpose to fit customers' demands.

CABLE TIES

尼龍束帶



CABLE TIE CROSS-REFERENCE


YY PART NO.	PANDUIT	TYTON	T&B	T&B (CATAMOUNT)
TSL-80-M	PLT.7M	T18S	TY23M	
TSL-100-M	PLT1M	T18R		L-4-18
TSL-140-M	PLT1.5M	T18I		
TSL-200-M	PLT2M	T18L	TY232M	L-8-18
TSL-150-I	PLT1.5I	T30R	TY24M	L-5-30
TSL-200-I	PLT2I	T40R		L-8-40
TSL-250-I	PLT2.5I			
TSL-300-I	PLT3I	T40I		L-11-40
TSL-370-I	PLT4I	T40L		L-14-40
TSL-120-S	PLT1S			L-5-50
TSL-160-S	PLT1.5S	T50S		
TSL-190-S	PLT2S			L-7-50
TSL-200-S		T50R	TY25M	
TSL-250-S	PLT2.5S			
TSL-290-S	PLT3S	T50I	TY253M	L-11-50
TSL-300-S				
TSL-370-S	PLT4S	T50L	TY28M	L-14-50
TSL-430-S	PLT5S			
TSL-200-LHD	PLT2H	T120S	TY272M	L-8-120
TSL-290-LHD	PLT3H	T120I		L-11-120
TSL-370-LHD	PLT4H	T120R	TY27M	L-14-120
TSL-450-LHD				L-18-120
TSL-540-LHD	PLT6LH			
TSL-430-HD	PLT5H			
TSL-530-HD	PLT6H	T150M		
TSL-770-HD	PLT8H			
TSL-800-HD		T150L		L-34-175
TSL-910-HD		T150LL		L-36-175
TSL-1200-HD	PLT13H	T150XL		L-48-175
TSL-240-EHD	PLT2EH	T250S		
TSL-300-EHD				
TSL-400-EHD				
TSL-500-EHD	PLT5EH	T250R		
TSL-600-EHD	PLT6EH	T250M		
TSL-700-EHD	PLT8EH	T250I		
TSL-800-EHD	PLT10EH	T250L		
TSL-1030-EHD	PLT12EH	T250XL		

CABLE TIES

尼龍束帶



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Stock in Natural & Black (other colors are also available)
- Application: its unique extended tab end permits easy release and reuse




RELEASABLE TIES

(03) 可鬆開式束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色、黑色
- ◎特點：齒頭上之舌片為活動型，易扣易解，可重複使用



品名 ITEM NO.	長度 LENGTH mm (in.)	寬度 WIDTH mm (in.)	最大束徑 Max. Dia. mm	最小拉力 Min. Tensile Strength kg (lbs)	包裝 PACKING
RT-100-I	102 (4.0")	3.6±0.3 (0.14"±0.012")	25	18 (40)	100 pcs
RT-150-S	157 (6.2")	4.8±0.25 (0.19"±0.01")	36	22 (50)	
RT-200-S	198 (8.0")		54		
RT-250-S	252 (10.0")		74		
RT-300-S	301 (12.0")		85		
RT-385-S	387 (15.2")		114		
RT-240-EHD	246 (9.6")	12.4±0.45 (0.51"±0.018")	64	114 (250)	
RT-300-EHD	293 (11.5")		81		
RT-400-EHD	404 (15.9")		114		
RT-500-EHD	509 (20.0")		150		
RT-600-EHD	618 (24.3")		181		
RT-700-EHD	724 (28.5")		216		
RT-800-EHD	830 (32.6")		248		

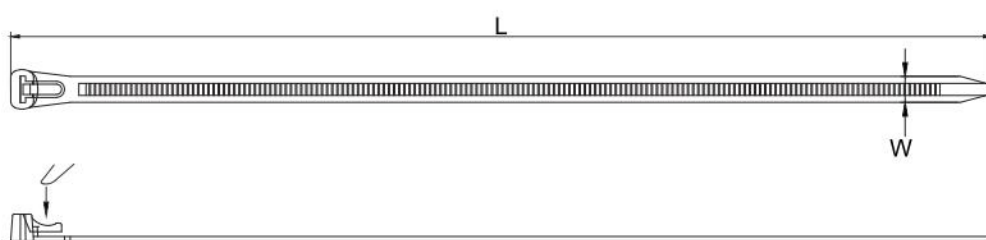

品名 ITEM NO.	長度 Length mm (inch)	寬度 Width mm (inch)	最大束徑 Max. Dia. mm	最小拉力 Min. Tensile Strength kg (lbs)	包裝 PACKING
RT-125-LHD	125 (4.9")	7.6±0.36 (0.30"±0.014")	30	22 (50)	100 pcs
RT-150-LHD	152 (5.9")		35		
RT-200-LHD	203 (8.0")		50		
RT-250-LHD	253 (10.0")		73		
RT-300-LHD	303 (11.9")		80		
RT-370-LHD	370 (14.5")		108		

CABLE TIES

尼龍束帶




MOUNTABLE HEAD TIES

(04) 圓頭鎖式束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色、黑色



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Stock in Natural & Black (other colors are also available)
- Application: Clamps are used to attach a bundle of wires to wall, control panel or ceiling



品名 ITEM NO.	長度 L mm (in.)	寬度 W mm (in.)	最大束徑 Max. Dia. mm	螺絲孔徑 mm (metric)	最小拉力 Min. Tensile Strength kg (lbs)	包裝 PACKING
MHT-100-M	113.0 (4.0")	2.5±0.25 (0.10"±0.01")	25	3.2 (#4)	8 (18)	100pcs/ 1000pcs
MHT-150-I	161.6 (6.0")	3.2±0.20 (0.14"±0.008")	36	4.1 (#8)	18 (40)	
MHT-200-S	198.0 (8.0")	4.8±0.25 (0.19"±0.01")	50	5.1 (#10)	22 (50)	
MHT-300-S	298.0 (12.0")		75	5.1 (#10)		
MHT-370-S	370.0 (14.5")		102	4.9 (#10)		
MHT-300-LHD	304.0 (12.0")	7.6±0.25 (0.30"±0.01")	80	6.0 (#12)	54 (120)	100 pcs
MHT-370-LHD	385.0 (15.0")		104	6.0 (#12)		




MARKER TIES

(05) 標示型束帶

- ◎材質：Nylon 6/6
- ◎防火等級：94V-2
- ◎顏色：本色



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural
- For use: Identifying telephone and fiber optic cable

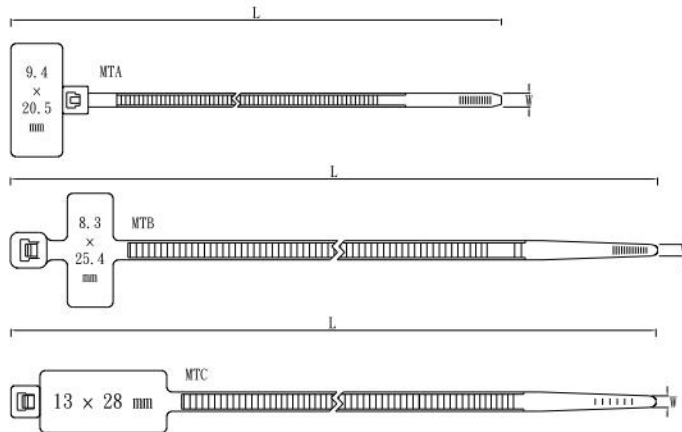

品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 MAX. DIA. (mm)	標示牌尺寸 Marker Size mm	最小拉力 MIN. STRENGTH kg (lbs.)	包裝 PACKING
MTA-110-M	105.0 (4.1")	2.5±0.20 (0.10"±0.008")	19	9.4*20.5	8 (18)	1000/ 100 pcs
MTB-100-M	96.0 (3.8")		21	8.3*25.4		
MTB-200-M	196.0 (7.7")		53			
MTC-200-S	201.0 (8.0")	4.6±0.30 (0.18"±0.012")	50	13*28	22(50)	100 pcs
MTC-270-S	270.0 (10.6")		75			

CABLE TIES

尼龍束帶





- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Nature & Black
- Working temperature: -40°C to 85°C
- Feature: Dual locking head design provide spacing for parallel bundles

DOUBLE HEAD CABLE TIE

(06) 雙頭式束帶

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色、黑色
- ◎工作溫度：-40°C to 85°C
- ◎特色：雙鎖扣設計，可同時安裝兩股平行線束

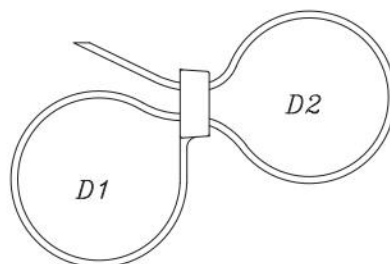

品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. Dia. mm		最小拉力 Min. Tensile Strength kg (lbs)	包裝 PACKING
			D1	D2		
DH-225-S	195.5 (7.7")	4.6±0.3 (0.18"±0.012")	49	50	22 (50)	100 pcs
DH-300-S	302.0 (11.9")		79	80	22 (50)	
DH-370-S	371.0 (14.6")		101	102	22 (50)	




SECURITY SEAL TIE

(06) 保全束帶

- ◎材質：PP
- ◎特色：束緊後無法鬆開以達到保全效果
- ◎顏色：黃、藍、綠、紅
- ◎可客製噴印，歡迎洽詢

- Material: PP
- Feature: Strong and Versatile One Piece Seal with Easy Tear-off Facility
Unique tail design ensures the seal is applied properly.
Strong teeth ensures a secure grip.
- Color: Yellow, Blue, Green, Red
- Customized printing is available upon request

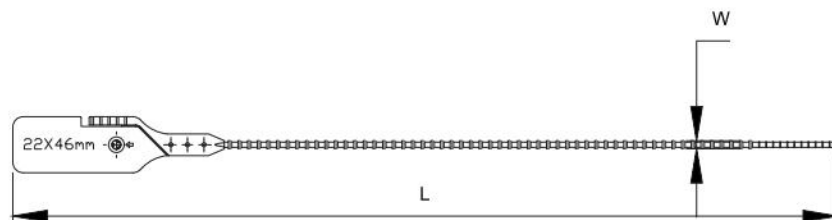

品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. Dia. mm	標示牌尺寸 Marker Size mm	包裝 PACKING
SST-250-I	245.0 (9.6")	3.6±0.20 (0.14"±0.008")	43	22*46	100 pcs
SST-300-I	295.0 (11.6")		60		
SST-400-I	397.0 (15.6")		92		

CABLE TIES

尼龍束帶



CABLE TIES AND FIR TREE MOUNT ASSEMBLIES

(06) 束帶含插鞘固定座

束帶

- ◎材質：耐衝擊等級 Nylon 6/6
- ◎防火等級：UL 94V-2 / UL 94HB
- ◎顏色：黑色
- ◎工作溫度：-40°C ~ +105°C

FTM1、FTM2、FTM3、FTM4、FTM5 以及 FTM6 固定座



- ◎材質：耐衝擊等級 Nylon 6/6
- ◎防火等級：UL 94V-2 / UL 94HB
- ◎顏色：黑色
- ◎工作溫度：-40°C ~ +110°C



◎若有材質、尺寸不在本表所列，亦歡迎洽詢


All Cable Ties

- Material: Nylon6/6 impact modified, heat stabilized, UV resistant
- Flammability: UL 94V-2 / UL 94HB
- Color: Black
- Working temperature: -40°C to +105°C
- Other material and size are also available upon request



FTM1, FTM2, FTM3, FTM4, FTM5 and FTM6 Mounts

- Material: Nylon 6/6 impact modified, heat stabilized, UV resistant
- Flammability: UL 94V-2 / UL 94HB
- Color: Black
- Working temperature: -40°C to +110°C
- Other material and size are also available upon request

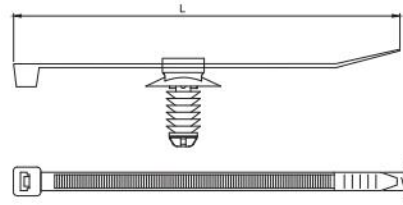

品名 ITEM NO.	束帶 Cable Tie				固定座 Mount				
	長度 Length mm (in.)	寬度 Width mm (in.)	最小拉力 Min. Tensile Strength kg (lbs)	最大束徑 Max. Dia. mm (in.)	DiscΦ mm (in.)	長度 (L2) Length mm (in.)	長度 (L3) Length mm (in.)	寬度 (W3) Width mm (in.)	高度 (H2) Height mm (in.)
FTM1- Mounting Hole : Φ0.177 - Φ0.197 (4.5-5.0mm) - Panel Thickness: Φ0.028 - Φ0.193 (0.7-3.0mm)									
FTHH1-150-I	150 (6")	3.5± 0.13 (0.14"±0.012")	40 (18)	37 (1.45")	16 (0.63")	11.6 (0.46")	13.2 (0.52")	5 (0.2")	6.9 (0.27")
FTHH1-200-S	199 (8")	4.6±0.3 (0.18"±0.012")	50 (22)	54 (2.13")					
FTM2- Mounting Hole : Φ0.252 - Φ0.28 (6.4-7.1mm) - Panel Thickness: Φ0.028 - Φ0.193 (0.75-3.0mm)									
FTHH2-150-I	150 (6")	3.5± 0.13 (0.14"±0.012")	40 (18)	37 (1.45")	16 (0.63")	11.6 (0.46")	13.8 (0.54")	5 (0.2")	7.5 (0.295")
FTHH2-160-S	157 (6.2")	4.6±0.3 (0.18"±0.012")	50 (22)	40 (1.57")					
FTHH2-200-S	199 (8")			54 (2.13")					
FTHH2-370-S	371 (14.6")			106 (4.17")					
FTM3- Mounting Hole : Φ0.256 - Φ0.276 (6.4-7.1mm) - Panel Thickness: Φ0.03 - Φ0.24 (0.75-6.0mm)									
FTHH3-150-I	150 (6")	3.5± 0.13 (0.14"±0.012")	40 (18)	37 (1.45")	16 (0.63")	11.6 (0.46")	17.5 (0.69")	5 (0.19")	11.1 (0.44")
FTHH3-160-S	157 (6.2")	4.6±0.3 (0.18"±0.012")	50 (22)	40 (1.57")					
FTHH3-200-S	199 (8")			54 (2.13")					
FTHH3-300-S	371 (14.6")			106 (4.17")					
FTM4 - Mounting Hole : Φ0.256 - Φ0.276 (6.5-7.0mm) - Panel Thickness: Φ0.031 - Φ0.276 (0.8-7.0mm)									
FTHH4-150-I	150 (6")	3.5±0.3 (0.14"±0.012")	40 (18)	37 (1.45")	16 (0.63")	11.6 (0.46")	19 (0.75")	5 (0.2")	12.7 (0.5")
FTHH4-160-S	157 (6.2")	4.6±0.3 (0.18"±0.012")	50 (22)	40 (1.57")					
FTHH4-200-S	199 (8")			54 (2.13")					
FTHH4-300-S	302 (11.9")			84 (3.3")					
FTHH4-370-S	371 (14.6")			106 (4.17")					
FTM5 - Mounting Hole : Φ0.3 - Φ0.31 (7.7-8.0mm) - Panel Thickness: Φ0.03 - Φ0.31 (0.8-8.0mm)									
FTHH5-150-I	150 (6")	3.5± 0.13 (0.14"±0.012")	40 (18)	37 (1.45")	16 (0.63")	12 (0.47")	17.8 (0.7")	9 (0.35")	11.5 (0.45")
FTHH5-200-S	199 (8")	4.6±0.3 (0.18"±0.012")	50 (22)	54 (2.13")					
FTHH5-300-S	302 (11.9")			84 (3.3")					
FTHH5-370-S	371 (14.6")			106 (4.17")					
FTM6 - Mounting Hole : Φ0.38 - Φ0.39 (9.7-10.0mm) - Panel Thickness: Φ0.031 - Φ0.236 (0.8-5.0mm)									
FTHH6-150-I	150 (6")	3.5± 0.13 (0.14"±0.012")	40 (18)	37 (1.45")	18 (0.71")	12 (0.47")	18.6 (0.75")	5 (0.2")	12.1 (0.48")
FTHH6-160-S	157 (6.2")	4.6±0.3 (0.18"±0.012")	50 (22)	40 (1.57")					
FTHH6-200-S	199 (8")			54 (2.13")					
FTHH6-300-S	302 (11.9")			84 (3.3")					
FTHH6-370-S	371 (14.6")			106 (4.17")					

CABLE TIES

尼龍束帶




PUSH MOUNT TIES

插鞘式束帶 (06)


- ◎材質：Nylon 6/6
- ◎防火等級：94V-2
- ◎顏色：本色、黑色
- ◎特點：錨狀式設計可將電線固定於機板
- ◎使用方法：依機板孔徑插入YY束帶，可固定並將電線分類紮緊



- Material: Nylon 6/6
 - Flammability: UL 94V-2
 - Color: Natural, Black
 - For use: Applied to attach a cable tie bundle to a surface such as a flat panel
- The anchor is easily pressed into a pre-drilled hole and locks in place



品名 ITEM NO.	長度 L mm (in.)	寬度 W mm (in.)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs.)	機板孔徑 Hole Dia Φ mm	機板厚度 Panel Thickness mm (in.)	包裝 PACKING
PT-150-I	168 (6.6")	3.8±0.3 (0.14"±0.01")	40	18 (40)	Φ4.8	~3.0(0.11")	1000& 100 pcs
PT-130-S	132 (5.2")	4.8±0.3 (0.19"±0.01")	30	22 (50)	Φ4.8		
PT-200-S	203 (7.9")		50	22 (50)	Φ6.4		

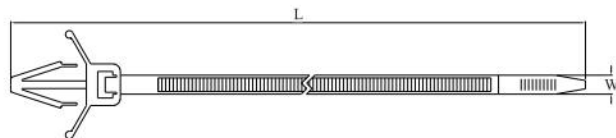


品名 ITEM NO.	長度 L mm (in.)	寬度 W mm (in.)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs.)	機板孔徑 Hole Dia Φ mm	機板厚度 Panel Thickness mm (in.)	包裝 PACKING
PMT-110-M	112 (4.4")	2.5±0.25 (0.10"±0.01")	25	8 (18)	Φ4.6	~2.6(0.10")	1000& 100 pcs
PMT-150-I	157 (6.0")	3.5±0.25 (0.14"±0.01")	36	18 (40)	Φ4.6	~2.6(0.10")	
PMT-133-S	133 (5.2")	4.8±0.3 (0.19"±0.01")	30	22 (50)	Φ4.6	~4.5(0.17")	
PMT-130-S	132 (5.2")		30	22 (50)	Φ6.0	~2.8(0.11")	
PMT-200-S	201 (7.9")		50	22 (50)	Φ6.0	~2.8(0.11")	

可鬆開式

品名 ITEM NO.	長度 L mm (in.)	寬度 W mm (in.)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs.)	機板孔徑 Hole Dia Φ mm	機板厚度 Panel Thickness mm (in.)	包裝 PACKING
PMT-150-LHD	152 (6.0")	7.9±0.36 (0.31"±0.014")	37	13 (30)	Φ5.4	~2.0 (0.08")	100 pcs

- Material: Nylon 12
- Color: Black
- Used widely in external applications, especially have excellent performance in a "salt atmosphere" environment



POLYAMID 12 LASHING TIES (06) 雙力道束帶


- ◎材質：Nylon 12
- ◎顏色：黑色



品名 ITEM NO.	長度 L mm (in.)	寬度 W mm (in.)	最大束徑 MAX. DIA. mm	最小拉力 MIN. STRENGTH kg (lbs.)	包裝 PACKING
LT-130-HD	132 (5.2")	9.0±0.36 (0.35"±0.014")	25	36 (79)	100 pcs
LT-180-HD	180 (7.1")		40		
LT-260-HD	265 (10.4")		78	55 (120)	
LT-360-HD	360 (14.1")		100		
LT-510-HD	510 (20.1")		150		

CABLE TIES

尼龍束帶




BEAD TIES

(06) 珠型結束帶

- ◎材質：Nylon 6/6
- ◎防火等級：94V-2
- ◎顏色：本色

- Material: Nylon 6/6, except for BT-100-M is PE
- Color: Natural (Black color is available upon request)
- Reusable, easy to install

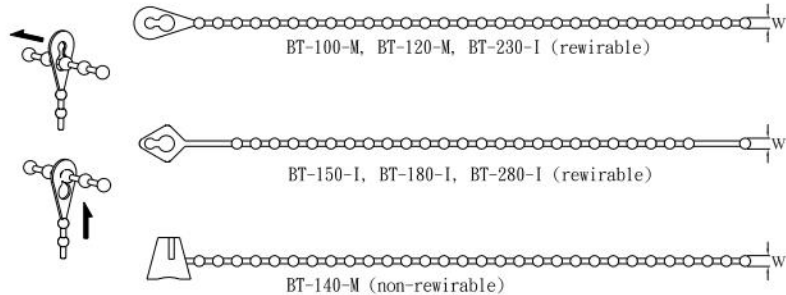

品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. Dia. mm	包裝 PACKING
BT-100-M	107 (4.2")	2.3 (0.10")	29	1000pcs
BT-120-M	120 (4.7")	2.3 (0.10")	30	
BT-140-M	145 (5.7")	2.0 (0.08")	39	500pcs
BT-150-I	150 (6.0")	2.9 (0.11")	39	100pcs
BT-180-I	180 (7.0")	2.9 (0.11")	49	
BT-230-I	226 (8.9")	3.8 (0.15")	63	
BT-280-I	273 (10.7")	3.0 (0.12")	75	




CORD BAND TIES


(06) 電源收線結束帶

- ◎材質：PE
- ◎顏色：本色、黑色
- ◎用途：一般電源線收線用

- Material: Polyethylene (PE)
- Color: Natural & Black
- For Use: Arrange the phone wires




品名 ITEM NO.	長度 Length mm (inch)	寬度 Width mm (inch)	最大束徑 Max. Dia. mm	包裝 PACKING
CB-140-HD	142 (5.6")	9 (0.35")	38	100pcs
CB-160-HD	157 (6.2")	8.6 (0.34")	40	500pcs
CB-180-HD	180 (7.1")	9 (0.35")	47	



品名 ITEM NO.	長度 Length mm (inch)	寬度 Width mm (inch)	最大束徑 Max. Dia. mm	包裝 PACKING
CFB-140-HD	140 (5.5")	10 (0.39")	34	500pcs
CFB-160-HD	160 (6.3")	8.5 (0.33")	45	100pcs

CABLE TIES

尼龍束帶



- Material: PP
- Color: Natural
- For Use: For tagging and attaching applications which require greater tension from the loop fastener



LOOP LOCKS-BARREL TIES

(06) 酒桶型套環

◎材質：PP
◎顏色：本色

品名 ITEM NO.	長度 Length mm (in.)	包裝 PACKING
LB-03	76 (3")	500pcs
LB-05	127 (5")	
LB-06	152 (6")	
LB-09	228 (9")	



- Material: PP
- Color: Natural
- For Use: For tagging and attaching applications which require greater tension from the loop fastener



PP LOOP LOCKS-CONE TIES

(06) 三角子母扣

◎材質：PP
◎顏色：本色

品名 ITEM NO.	長度 Length mm (in.)	包裝 PACKING
LC-02	55 (2")	1000pcs
LC-03	85 (3")	
LC-04	105 (4")	
LC-05	135 (5")	
LC-06	155 (6")	
LC-07	185 (7")	
LC-09	235 (9")	
LC-12	315 (12")	
LC-18	457 (18")	



- Material: PVC / PE
- Color: Natural, Black

品名 ITEM NO.	寬度 mm	包裝 PACKING	材質 Material
PTT-3	2.4	1kg / roll , ground 280 / roll	PVC
PTT-4	3.9	1000M / roll	PE

Twist Ties

(06) 魔帶


◎材質：PVC/PE
◎顏色：黑色、白色
◎可裁切

CABLE TIES

尼龍束帶



- Material: Nylon, with Mushroom hook
- Color: Black; other colors also available (green, blue, orange, red, yellow, etc.)
- For Use: Reusable ties in fastening; suitable for Internet wires
- KITS packing, grip ties with printing are also available upon request




樣式 Type	品名 ITEM NO.	長度 Length mm	寬度 Width mm	顏色 Color	包裝 PACKING
	GT-13150	152	13	Black	100pcs
	GT-13200	200	13		
	GT-13250	252	13		
	GT-12300	305	12		


GRIP TIES

(06) 黏扣帶

- ◎材質：Nylon
- ◎顏色：黑色；彩色（綠、藍、橘、紅、黃等）接受訂製
- ◎適用於網路線、訊號線，可重複使用
- ◎特殊尺寸，歡迎訂製




樣式 Type	品名 ITEM NO.	長度 Length mm	寬度 Width mm	顏色 Color	包裝 PACKING
	GTH-20300	300	20	Black	100pcs
	GTH-30400	400	30		
	GTH-30600	600	30		

樣式 Type	品名 ITEM NO.	長度 Length M	寬度 Width mm	顏色 Color	包裝 PACKING
	GT-1005	5	10	Black	per roll
	GT-1010	10	10		
	GT-1210	10	12		
	GT-1225	25	12		
	GT-1303	3	13		
	GT-1305	5	13		
	GT-1505	5	15		
	GT-1510	10	15		
	GT-16046	4.6	16		
	GT-1623	23	16		
	GT-1910	10	19		
	GT-1925	25	19		
	GT-2003	3	20		
	GT-2525	25	25		



Head with backed adhesive tape


樣式 Type	品名 ITEM NO.	長度 Length M	寬度 Width mm	顏色 Color	包裝 PACKING
	GTR-2025-HR	25	20	Black	per roll
	GTR-2025-LR	25	20		
	GTR-3025-HR	25	30		
	GTR-3025-LR	25	30		

CABLE TIES

尼龍束帶



- Material: 304/316 stainless steel
- Operation Temp: -80°C to 538°C
- For use: Automobile, Electronic, Hardware, Bundling application
- Stainless steel cable tie with a unique ball locking mechanism allows the tie to be quickly & easily installed



BEAD SELF-LOCKING STAINLESS STEEL TIES

(04) 珠式不鏽鋼束帶


- ◎材質：304 或 316 不鏽鋼材質
- ◎特點：不鏽鋼材質適合於戶外使用，具有更高一級的耐候特性



品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. dia. mm	最小拉力 Min. Strength kg (lbs)	包裝 PACKING
ST-130-S	127 (5.0")	4.6 (0.18")	225	45 (100)	100 pcs
ST-200-S	201 (7.9")		51		
ST-260-S	266 (10.5")		69		
ST-300-S	300 (11.8")		80		
ST-360-S	362 (14.3")		102		
ST-520-S	521 (20.5")		152		
ST-680-S	679 (26.8")		203		
ST-840-S	838 (33.0")		254		
ST-1100-S	1067 (42.0")		304		
ST-1200-S	1194 (47.0")		355		
ST-130-LHD	127 (5.0")	7.9 (0.31")	25	114 (250)	100 pcs
ST-200-LHD	201 (7.9")		51		
ST-260-LHD	266 (10.5")		69		
ST-360-LHD	362 (14.3")		102		
ST-520-LHD	521 (20.5")		152		
ST-680-LHD	679 (26.8")		203		
ST-840-LHD	838 (33.0")		254		
ST-1100-LHD	1067 (42.0")		304		
ST-1200-LHD	1194 (47.0")		355		
					50 pcs



- Material: 316 stainless steel with Epoxy coating
- Operation Temp.: -40°C to 150°C
- Epoxy coated stainless steel tie has insulation effect



COATING BEAD SELF-LOCKING STAINLESS STEEL TIES

(04) 珠式烤漆不鏽鋼束帶

- ◎材質：316 不鏽鋼材質
- ◎特點：不鏽鋼表面烤漆絕緣效果更佳




品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. dia. mm	最小拉力 Min. Strength kg (lbs)	包裝 PACKING
ST2-130-S	127 (5.0")	4.6 (0.18")	25	45 (100)	100 pcs
ST2-200-S	201 (7.9")		51		
ST2-260-S	266 (10.5")		69		
ST2-360-S	362 (14.3")		102		
ST2-520-S	521 (20.5")		152		
ST2-680-S	679 (26.8")		203		
ST2-840-S	838 (33.0")		254		
ST2-1100-S	1067 (42.0")		304		
ST2-1200-S	1194 (47.0")		355		
					50 pcs
ST2-130-LHD	127 (5.0")	7.9 (0.31")	25	90 (200)	100 pcs
ST2-200-LHD	201 (7.9")		51		
ST2-260-LHD	266 (10.5")		69		
ST2-360-LHD	362 (14.3")		102		
ST2-520-LHD	521 (20.5")		152		
ST2-680-LHD	679 (26.8")		203		
ST2-840-LHD	838 (33.0")		254		
ST2-1100-LHD	1067 (42.0")		304		
ST2-1200-LHD	1194 (47.0")		355		
					50 pcs

CABLE TIES

尼龍束帶



- Material: 316 stainless steel with Nylon coating
- Operation Temp.: -60°C to 150°C
- For use: Automobile, Electronic, Hardware, Bundling application
- A unique multi-locking system for a strong secure hold with a tensile loop strength, self-locking for fast and easy application.



MULTI-LOCKING STAINLESS STEEL TIES

(04) 多鎖式不鏽鋼束帶

- ◎材質：316 不鏽鋼材質
- ◎抗 UV，雙鎖式設計，承受力更佳



品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. dia. mm	最小拉力 Min. Strength kg (lbs)	包裝 PACKING
MST2-200-LHD	195 (7.7")	7.0 (0.28")	46	45 (100)	100 pcs
MST2-250-LHD	255 (10.0")		65		
MST2-330-LHD	335 (13.2")		90		
MST2-500-LHD	450 (17.7")		127		
MST2-610-LHD	610 (24.0")		178		
MST2-200-EHD	195 (7.7")	12.0 (0.47")	46	67 (150)	50 pcs
MST2-250-EHD	255 (10.0")		65		
MST2-330-EHD	335 (13.2")		90		
MST2-500-EHD	450 (17.7")		127		
MST2-610-EHD	610 (24.0")		178		




LOCK STAINLESS STEEL TIES

(04) 夾鎖式不鏽鋼束帶

- ◎材質：316 不鏽鋼材質
- ◎特色：抗 UV，可重複使用



- Material: 316 stainless steel with Nylon coating
- Operation Temp.: -60°C to 150°C
- For use: Automobile, Electronic, Hardware, Bundling application
- It permits easy release and reuse.

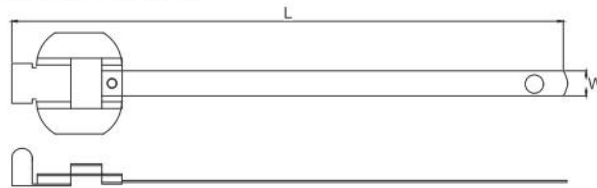

品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	最大束徑 Max. dia. mm	最小拉力 Min. Strength kg (lbs)	包裝 PACKING
LST2-150-LHD	152 (6.0")	6.3 (0.25")	38	45 (100)	50 pcs
LST2-230-LHD	229 (9.0")		63		
LST2-300-LHD	305 (12.0")		86		
LST2-450-LHD	457 (18.0")		137		
LST2-610-LHD	610 (24.0")		185		
LST2-150-HD	152 (6.0")	9.5 (0.38")	38	67 (150)	
LST2-230-HD	229 (9.0")		63		
LST2-300-HD	305 (12.0")		86		
LST2-450-HD	457 (18.0")		137		
LST2-610-HD	610 (24.0")		185		



STAINLESS STEEL MARKER PLATE

(04) 不鏽鋼標示牌

- ◎材質：316 不鏽鋼材質
- ◎特色：與珠式不鏽鋼束帶一起使用



- Material: 316 stainless steel
- For use: Attached with Stainless Steel Ties, designed to provide identification in harsh environments, could be used as a flag or wrap

品名 ITEM NO.	長度 Length mm (in.)	寬度 Width mm (in.)	高度 Height mm (in.)	適用束帶寬度 Used with Cable Tie Width mm (inch)	包裝 PACKING
MP2-095089	9.5 (0.37")	89 (3.5")	0.25 (0.01")	4.6 (0.18")	100 pcs
MP2-095102	9.5 (0.37")	102 (4.02")	0.25 (0.01")	4.6 or 7.9 (0.18" or 0.31")	
MP2-190089	19 (0.75")	89 (3.5")	0.25 (0.01")	4.6 (0.18")	

CABLE TIES

尼龍束帶



STAINLESS STEEL BANDING

(04) 不鏽鋼鋼捲

- ◎材質：304 或 316 不鏽鋼材質
- ◎特色：可於嚴苛環境下使用
- ◎用途：適用於工業、船舶業、建築業等之標示牌、監測器、電線桿網綁



- Material: 304/316 stainless steel
- Features: Premium quality strapping for extreme indoor and outdoor conditions
- Application: Industrial, offshore, subsea and construction

304 Stainless Steel

品名 ITEM NO.	寬度 Suitable tie width mm (in.)	厚度 Tie Thickness mm (in.)	包裝 PACKING
SR-095030-T	9.5 (3/8")	0.4 (1/64")	30.5M/roll, 1 roll/box
SR-127030-T	12.7 (1/2")	0.4 (1/64")	
SR-160030-T	16.0 (5/8")	0.4 (1/64")	
SR-190030-T	19.0 (3/4")	0.7 (1/32")	
SR-254030-T	25.4 (1")	1.0 (3/64")	
SR-095030-T1	9.5 (3/8")	0.6 (1/32")	
SR-127030-T1	12.7 (1/2")	0.7 (1/32")	
SR-160030-T1	16.0 (5/8")	0.7 (1/32")	
SR-190030-T1	19.0 (3/4")	0.7 (1/32")	
SR-254030-T1	25.4 (1")	1.2 (3/64")	

316 Stainless Steel

品名 ITEM NO.	寬度 Suitable tie width mm (in.)	厚度 Tie Thickness mm (in.)	包裝 PACKING
SR2-127030-T	12.7 (1/2")	0.5 (1/64")	30.5M/roll, 1 roll/box
SR2-160030-T	16.0 (5/8")	0.5 (1/64")	
SR2-190030-T	19.0 (3/4")	0.5 (1/64")	
SR2-095030-T1	9.5 (3/8")	0.4 (1/64")	
SR2-127030-T1	12.7 (1/2")	0.8 (1/32")	
SR2-160030-T1	16.0 (5/8")	0.75 (1/32")	
SR2-190030-T1	19.0 (3/4")	0.8 (1/32")	



STAINLESS STEEL BUCKLE

(04) 不鏽鋼鋼扣

- ◎材質：304 或 316 不鏽鋼材質
- ◎特色：抗腐蝕性佳，可於嚴苛環境下使用
- ◎用途：適用於工業、船舶業、建築業等之線束網綁、管線固定



- Material: 304/316 stainless steel
- Features: Offers good resistance to oxidation and many moderate corrosive agents
- Application: Industrial, offshore, subsea and construction

樣式 TYPE	品號 ITEM NO.	寬度 Suitable tie width mm (in.)	孔內高度 buckles thickness mm (in.)	包裝 PACKING
	LBK-095	9.5 (3/8")	1.0 (3/64")	100 pcs/box
	LBK-127	12.7 (1/2")	1.3 (3/64")	
	LBK-160	16.0 (5/8")	1.3 (3/64")	
	LBK-190	19.0 (3/4")	1.7 (1/16")	
	LBK-254	25.4 (1")	2.5 (3/32")	
	SBK-095	9.5 (3/8")	0.7 (1/32")	
	SBK-127	12.7 (1/2")	0.7 (1/32")	
	SBK-160	16.0 (5/8")	0.7 (1/32")	
	SBK-190	19.0 (3/4")	1.0 (3/64")	

CABLE TIES

尼龍束帶

CABLE TIE TOOLS

(99) 束槍

Photo	ITEM NO.	Description
	CTG-5	It's used for miniature, intermediate and standard cable ties tensioning and cut-off (tie width from 2.5-4.8mm) Weight: 0.067kg Trigger Handle: Black Color: Orange
	CTG-6	It's used for miniature, intermediate and standard cable ties (tie width from 2.5-4.8mm). Press the cutter handle to cut off the cable tie Weight: 0.2kg Color: Red
	CTG-7	It's used for miniature, intermediate and standard cable ties (tie width from 2.5-4.8mm) Tensioning and cut-off Weight: 0.21kg Length: 156.3mm Color: Blue Width: 130.5mm
	CTG-8	It's used for miniature, intermediate and standard cable ties (tie width from 2.5-4.8mm) Fasten and automatic cut ties, with adjustable bundling pressure Weight: 0.30kg Color: Blue
	CTG-9	It's used for intermediate, standard, light heavy duty and heavy duty cable ties (tie width from 3.6-9.0mm) Comfortable hand force Weight: 0.32kg Length: 195mm Color: beige Width: 96mm
	CTG-9-SP	It's used for intermediate, standard, light heavy duty and heavy duty cable ties (tie width from 3.6-9.0mm) Comfortable hand force, with safe protector to prevent injury while cutting. Weight: 0.33kg Length: 195mm Color: beige Width: 96mm
	CTG-10	It's used for intermediate, standard, light heavy duty, heavy duty and extra heavy duty cable ties (tie width from 3.6-12.4mm) Comfortable hand force Tensioning and auto cut-off Weight: 0.32kg Color: Red
	STG-1	It is used for standard and light heavy duty stainless steel ties (tie width up to 7.9mm) Fasten and automatic cut ties with adjustable bundling pressure TPR trigger handle Weight: 0.56kg Color: Grey
	STG-7	It is used for standard, light heavy duty, heavy duty and extra heavy duty stainless steel ties (tie width from 4.8-12mm) Install tie to bundle. Tension tie to the desired tension and twist to cut off to complete the installation Weight: 0.49kg Color: Black handling





PRODUCT CATALOG

尼龍束帶 CABLE TIES



Y.Y. CABLE TIES
尼龍束帶 P1-10



POLYPROPYLENE
CABLE TIES
PP束帶 P6



RELEASABLE
TIES
可鬆開式束帶 P11



MOUNTABLE
HEAD TIES
圓頭鎖式束帶 P12



MARKER TIES
標示型束帶 P12



DOUBLE HEAD
CABLE TIE
雙頭式束帶 P13

配線固定零件 TIE MOUNTS CLAMPS



TIE MOUNTS
(SELF-ADHESIVE)
黏式固定座 P23



TIE MOUNTS
(SADDLE TYPE)
馬蹄型固定座 P23



CABLE CLAMPS
配線固定鈕 P24



MANSONRY PUSH
MOUNTS
壁虎固定座 P24



FJC CLIP
J型固定夾 P25



CABLE MOUNT
電線固定夾 P25

配線保護零件 PROTECTS



HEAT SHRINKABLE
TUBINGS
薄壁熱收縮套管 P34



DUAL WALL
(Adhesive-lined)
雙層含膠含水型熱
收縮套管 P35



HEAT SHRINKABLE
TUBING BOX
熱縮管整理盒 P36



HOT AIR GUN
熱風槍 P36



SPLIT FLEXIBLE
CONDUIT
剖開式浪管 P37



SOLID FLEXIBLE
CONDUIT
密閉式浪管 P38

電線接頭端子 CONNECTORS



CLOSED-END
CONNECTORS
閉端端子 P47



WING
CONNECTORS
翼型彈簧式旋轉接頭 P47



WIRE-NUT
CONNECTORS
彈簧螺式接頭 P48



ULTRA
CONNECTORS
插線式連接器 P48



QUICK SPLICE
電源接線夾 P49



ALLIGATOR
CLIPS&TUBES
鱷魚夾 P49



RING NON-INSULATED
TERMINAL
R型裸端子 P59



SPADE NON-
INSULATED TERMINAL
Y型裸端子 P60



NON-INSULATED
PARALLEL SPLICE
短銅管 P60



NON-INSULATED
BUTT CONNECTOR
長銅管 P61



RING TUBULAR
LUGS
R型高壓銅管端子 P61



HAND CRIMPING
TOOLS
端子工具 P62

配線槽 WIRING DUCTS



PLASTIC WIRING
DUCTS
絕緣配線槽 P63-64



WIRING DUCT
COVER
絕緣配線槽蓋 P65



WIRING-DUCT
CUTTER
線槽剪 P65



TELEPHONE
WIRING DUCTS
電話配線槽 P66



DECORATION
WIRING DUCTS
裝潢配線槽 P66



ROUND TYPE
WIRING DUCTS
半圓弧形地板型配
線槽 P67

配線標誌 CABLE MARKERS



CABLE
MARKERS
PVC 配線標誌圈 P68



CABLE MARKER
STRIP
標誌靶 P68



MARKER PLATE
標誌銘牌 P68



OM TYPE
MARKERS
OM 型標誌圈 P69



CLIP-ON CABLE
MARKER
插入式配線標誌 P69



MARKER CARDS
布質配線標誌 P69

電纜固定頭 CABLE GLANDS



NYLON CABLE
GLAND P71-73
MM 型尼龍電纜固定頭



NYLON CABLE
GLAND P74
PG 型尼龍電纜固定頭



NYLON CABLE
GLAND P74
NPT 型尼龍電纜固定頭



MULTI-HOLE
SEAL
多孔內塞

PC板固定零件 P.C.B FASTENERS



LOCKING WIRE
隔離束徑座 P75



TWIST HOLDERS
隔離扭線環 P75



MINIATURE
SUPPORT POST
PC板隔離插柱 P75



DUAL LOCKING
SUPPORTS
雙鉤式隔離插柱 P76



SCREW FASTENED
CIRCUIT BOARD
SUPPORT
平底式隔離插柱 P76



SLIDE SPACER
SUPPORTS
推式隔離插柱 P77



Samples & Complete Catalogue Available 如需樣品和完整目錄歡迎洽詢



DOUBLE-SIDED FOAM TAPE 雙面膠帶 P65



MARKING PEN 速乾筆 P70



MARKING MACHINE 打字機 P70



DAMPER P80



REVERSE SPACER SUPPORT PC 板間隔柱 P77




MUSHROOM SPACER SUPPORTS 平頂隔離插柱 P77



PLASTIC SCREWS 塑膠螺絲 P78



PUSH RIVETS 推式鉚釘 P78



DIN RAILS 鋁軌 P79



ANCHOR CLIP P79



PUSH RIVET P79



SCRIVET P79



TRIM CLIP P80



CABLE CLIP P80



RELIABLE · CREATIVE · PERSONAL
科學化研發 · 專業化製造 · 先進化管理



YONYU GROUP

Y.Y. CABLE ACCESSORIES CO., LTD.
YONYU PLASTICS CO., LTD.
YONYU APPLIED TECHNOLOGY MATERIAL CO., LTD.

精奕興業股份有限公司
永裕塑膠工業股份有限公司
新永裕應用科技材料股份有限公司

WORLDWIDE HEADQUARTER & SALES OFFICE
107, Sheng Li Road, Jen-Teh District,
Tainan City, Taiwan

TEL: 886-6-7020888(REP.) 886-6-2705577
FAX: 886-6-2702943 886-6-2795295

<http://www.yy-yonyu.com.tw> · <http://www.yy-yonyu.com.cn>
E-mail: sales@yy-yonyu.com.tw · Skype: sales-yy

- 新田總廠 HSIN-TIEN FACTORY
台灣省台南市仁德區新田里勝利路107號
- 勝利二廠 SHENG-LI FACTORY
台灣省台南市仁德區新田里勝利路100號
- 勝利三廠 SHENG-LI FACTORY
台灣省台南市仁德區新田里勝利路125號
- 上海總廠 SHANG HAI FACTORY
上海市閩行區常青工業區都會路335弄88號